

SIMFLO®

THE SM6




AVAILABLE
CERTIFIED TO
NSF

Certified to
NSF/ANSI/CAN 61
& NSF/ANSI 372

SM6 continues with our commitment to heavy wall bowl castings and robust impeller skirts. Matched with SIMFLO's tried and true bearing system the SM6 provides long life in the harshest well conditions.


- 125 - 300 GPM OPTIMIZED PERFORMANCE
- 6" BOWL DIAMETER
- 316 STAINLESS STEEL IMPELLERS
- BOLTED BOWL DESIGN

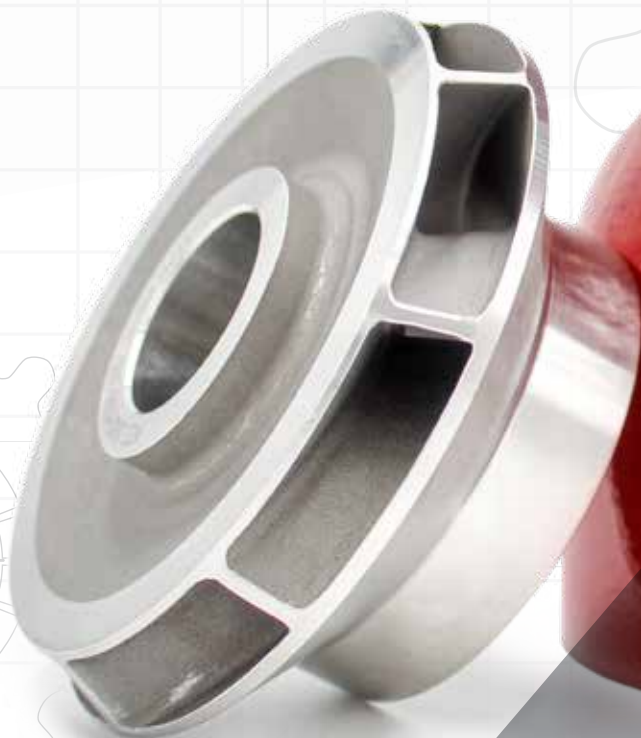

FEATURES & BENEFITS

- BOLTED BOWL DESIGN TO FIT A WIDE RANGE OF INDUSTRIAL AND AGRICULTURAL APPLICATIONS
- SIMFLO'S BEARING STRUCTURE RESULTS IN THE LONGEST PUMP LIFE IN THE INDUSTRY
- DESIGNED TO PERFORM AND PROLONG SERVICE LIFE
- WIDE FLOW RANGE AND HIGH PERFORMANCE

SM6M SINGLE STAGE 3450 RPM PERFORMANCE CURVE

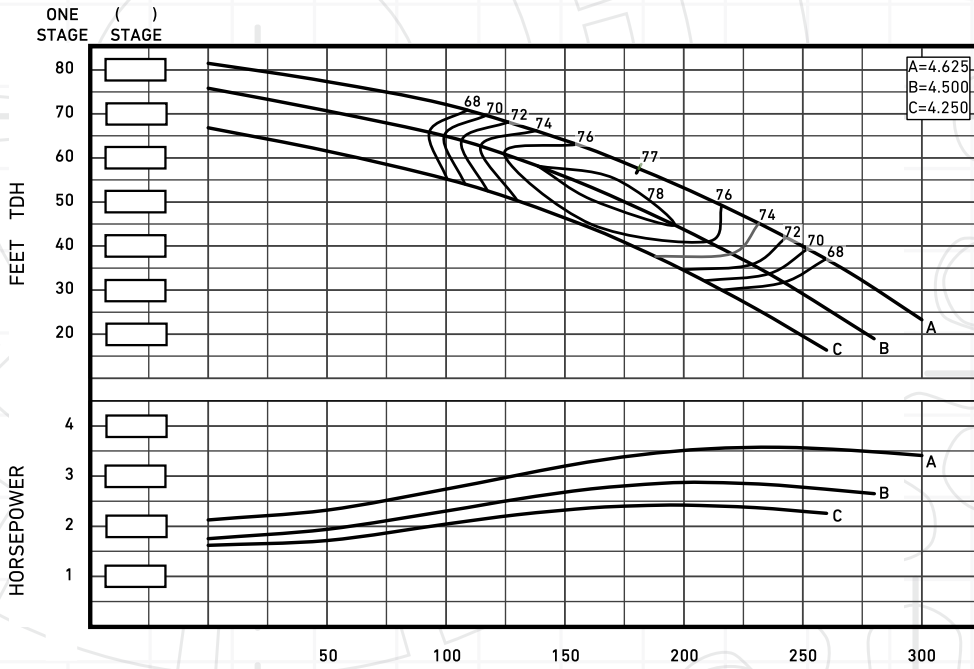

SM6H SINGLE STAGE 3450 RPM PERFORMANCE CURVE

